



Tips to Installing Bird Jolt Flat Track™



Bird Jolt Flat Track™ is a low profile electric track system that is easy to install with some basic electrical knowledge. It should be used on flat surfaces in an open area where birds may be roosting.

Tips to a successful Bird Jolt Flat Track™ installation.

1. Before you install Bird Jolt Flat Track™ to the surface to protect, be sure to clean the surface are thoroughly. Remove all debris such as nesting material, branches and twigs. Clean off all bird droppings and disinfect the area. Now you are ready to install the Bird Jolt Flat Track™ or any bird deterrent product to the surface.

Warning: Electric track systems should not be used if contact with flammable liquids, vapors or fumes is possible. Electric track systems should never be used in and around gas stations.



2. While installing the track, check periodically with a voltage meter that all connections are good. This will save time in the long run if you need to trouble shoot why the track is not getting power. You do not want to go back and remove track and reinstall it.
3. When spec'ing out your job, be sure to get enough charging units for the amount of track. The Solar Charger will power 300 feet of track and the Direct Charger will power up to 500 feet.



BIRD•B•GONE®
Inc.

800.392.6915 | birdbgone.com




Tips to Installing Bird Jolt Flat Track™

4. Be sure to install Solar Chargers facing south; they need to have as much sun exposure as possible to be effective. Set the charger in the sun the day prior to installation, if possible to get a good charge for the battery.
5. When using a Direct Plug-in Charger, be sure to install it in a weatherproof box, especially in wet climates. This will ensure that your electric track installations performs as expected, and you will not have to come out and repair battery damage.
6. It is very important that you install enough warning labels so that no one interferes with your Bird Jolt Flat Track™ installation. You need to be sure that the track is not compromised and that no one gets hurt if they inadvertently touch the track.



Install Direct Plug-in Charger in Weatherproof Box

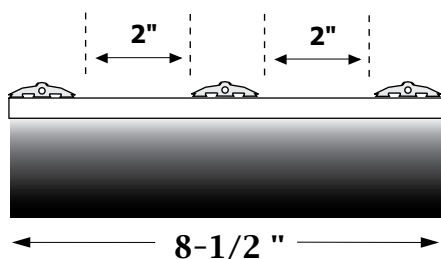

More than one row may be needed for wide areas to be covered.

7. When installing Bird Jolt Flat Track™ on surfaces wider than 5", you should install more than one row of track. To determine how many rows of track, measure the width of the surface the track will be installed on. Give no more than a 2" gap between rows. You want to be sure that birds can not land behind or between the track rows.

8. Be sure to allow glue to cure thoroughly during installation. Glue must be completely dry (cured) before the system will be effective.

Keeping these simple tips in mind during your next Bird Jolt Flat Track™ job, will help ensure a successful installation.

**For more information or help planning your next Bird Jolt Flat Track™ installation call us at:
(800) 392-6915**



BIRD•B•GONE®

Inc.

birdbgone.com